



Removing and installing seat bench

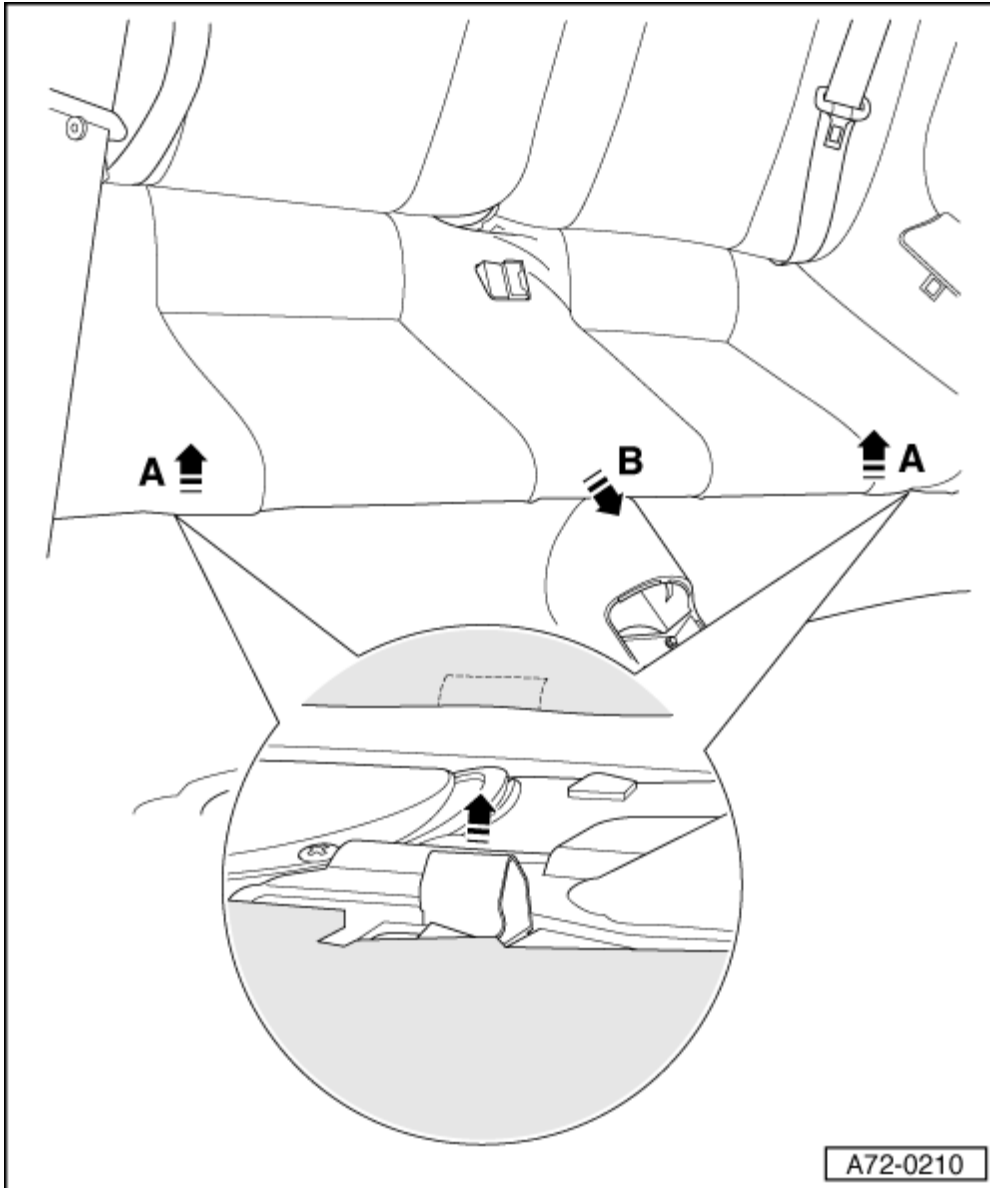

Removing

- Lift seat bench, arrows -A- and pull forwards, arrow -B-.

Installing

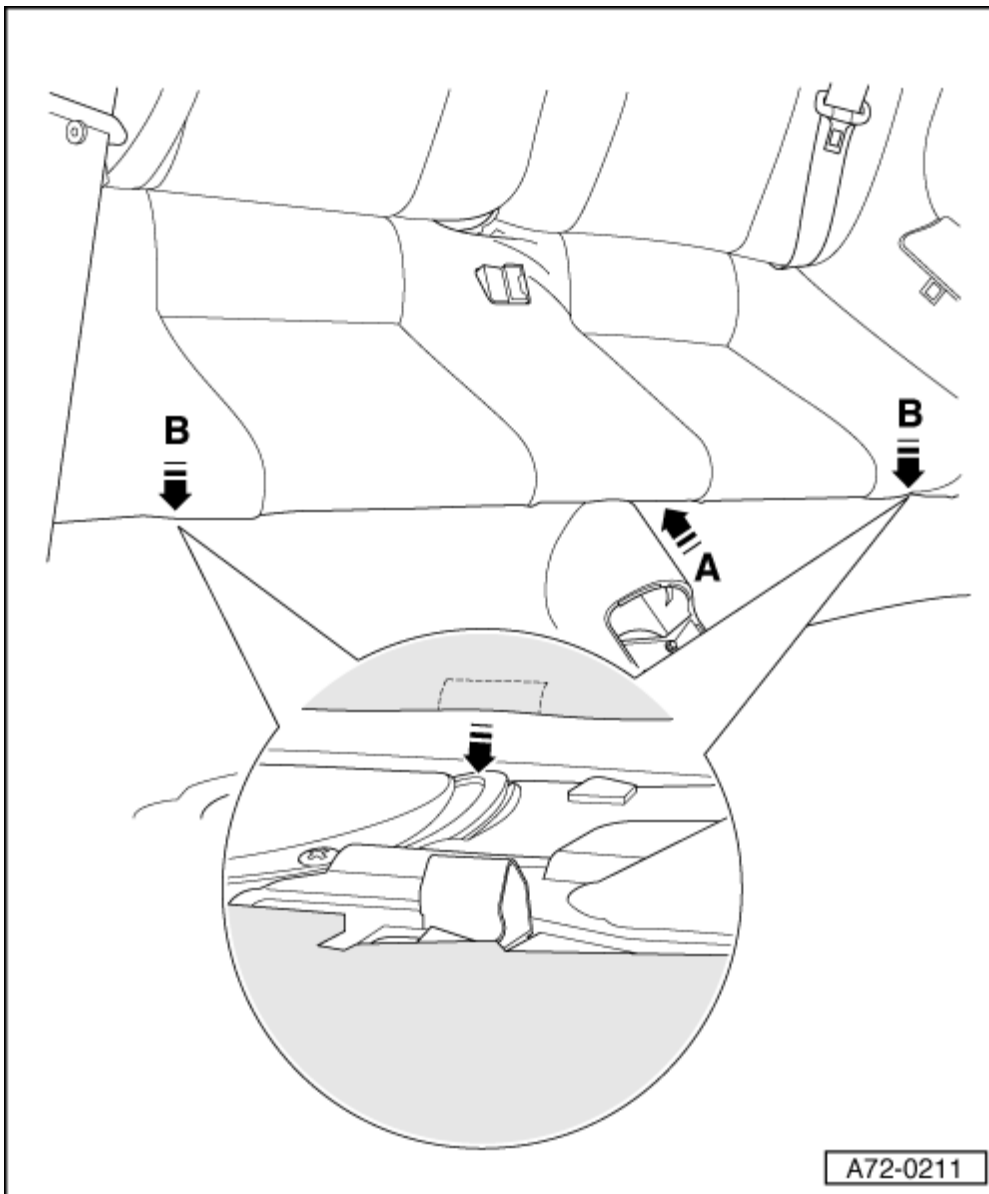

A72-0211

- Slide seat bench to rear, arrow -A-.
 - Guide seat bench into plastic clips and press in, arrow -B-.
- On installation, take care not to damage plastic clips.